



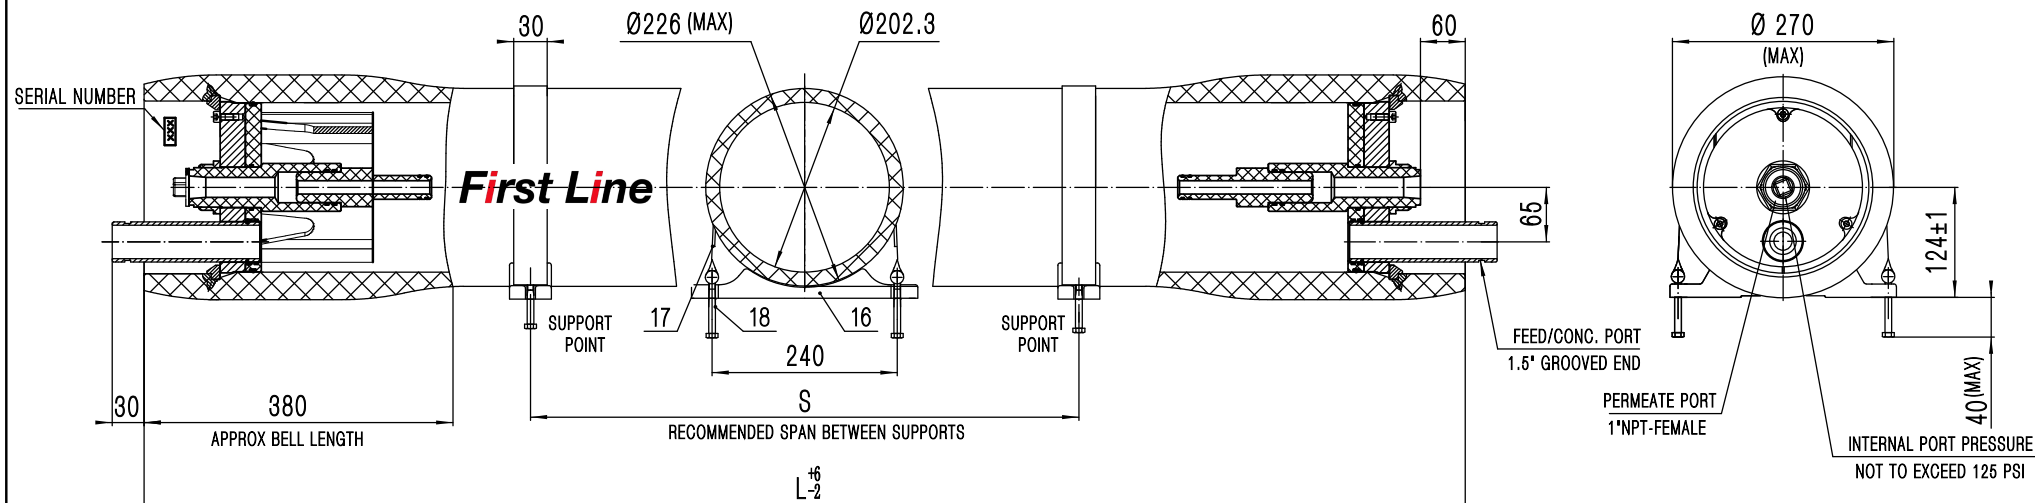

REF.	QTY.	PART NUMBER	DESCRIPTION	MATERIAL	REMARK
1	1	See Selection Table	Shell	Epoxy FRP	White
2	2	20003119	Bearing Plate	Aluminium Alloy	
3	2	20001183	Sealing Plate	ABS	
4	2	20002270	Permeate Port	ABS	
5	1	20000073	Plug	ABS	
6	2	20000698	Nut	ABS	
7	2	20000425	Feed/Conc. Port	2507SST	
8	4	20000658	Retaining Ring	2507SST	
9	2	20001074	O-ring , Head	EPDM	
10	4	20002432	O-ring , F/C Port	EPDM	
11	2	20002432	O-ring , Permeate Port	EPDM	
12	1	20000314	O-ring , Plug	EPDM	
13	6	20000008 09 10	Locking Kit Segment	316SST	
14	6	20001045	Locking Segment Screw	316SST	M8x20
15	6	20001047	Spring Pad	316SST	Ø8
16	2~4	20000002	Saddle	Thermoplastic Rubber.	
17	2~4	20001043	Strap	316SST-PVC	
18	4~8	20001046	Strap Screw	316SST	M8*90
19	4	20000314	O-ring , Adapter	EPDM	
20	2	20002250	Adapter	PPO	
21	2	20000020	Shim , Adapter	ABS	2mm
22	4	20002423	O-ring , PWT	EPDM	
23	1	20000420	Thrust Ring	ABS	
24	2	30200026	Embedded Ring	316SST	

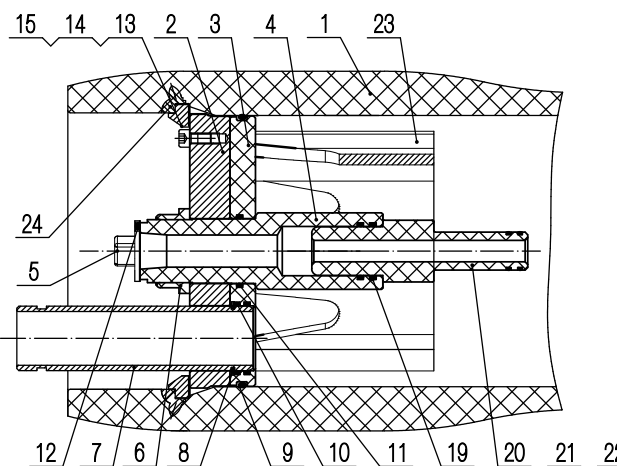

- GENERAL NOTES:**
1. DIMENSIONS IN MM.
 2. MAX. ANGULAR VARIATION BETWEEN ANY PORT ±0.5.
 3. DESIGN PRESSURE: 1000PSI.
 4. DESIGN TEMPERATURE: Min.-7°C(20°F)-Max.65°C(149°F).
 5. FOR OTHER TEMPERATURES OUT OF THIS RANGE CONTACT FIRST LINE .
 6. CENTER VESSEL ON 2, 3 OR 4 SUPPORTS AT SPAN'S*: 2 SUPPORTS(FOR LENGTH 1-3), 3 SUPPORTS(FOR LENGTH4-6) OR 4 SUPPORTS (FOR LENGTH 7-8) .
 7. FOR VESSEL INSTALLATION AND MAINTENANCE PLEASE REFER TO FIRST LINE USER'S MANUAL.
 8. FOR REFERENCE ONLY, NOT FOR CONSTRUCTION UNLESS CERTIFIED.

Ref.	Part Number	L (MM)	S (MM)	Approx Assembly Weight (KG)
1	R801000E-1	1582	580	58-61
2	R801000E-2	2598	1350	72-77
3	R801000E-3	3614	2080	86-93
4	R801000E-4	4630	1600x2	100-109
5	R801000E-5	5646	2000x2	114-125
6	R801000E-6	6662	2360x2	128-141
7	R801000E-7	7678	2000x3	143-158
8	R801000E-8	8694	2350x3	157-174

First Line International Environment Technology

First Line

Design Date	Model
Review Date	DRG
Approval Date	Unit
	REV.
	MM
	2026

R80-1000E

R80-1000E-00-01